


- rectangular, height 8mm
- top active face
- metal, die-cast zinc
- connector with snap-on connection
- factor 1 for all metals
- magnetic field immune
- extended temperature range
- high switching frequency
- 3-wire DC, 10..0.30 VDC
- normally open, pnp output
- flange connector, Ø 8 mm

<b>Type</b>	Bi5U-Q08-AP6X2-V1131
Ident-No.	1608900
<b>Rated operating distance Sn</b>	5 mm
Mounting condition	flush
Assured switching distance	≤ (0,81 x Sn) mm
Repetition accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Hysteresis	3... 15 %
Ambient temperature	-30...+ 85 °C
<b>Operating voltage</b>	10... 30 V DC
Residual ripple	≤ 10 % U <sub>SS</sub>
DC rated operational current	≤ 200 mA
No-load current I <sub>0</sub>	≤ 15 mA
Residual current	≤ 0.1 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes / cyclic
Voltage dip at I <sub>e</sub>	≤ 1.8 V
Wire breakage / reverse polarity protection	yes / complete
Output function	3-wire, normally open, pnp
Switching frequency	≤ 0.25 kHz
<b>Housing style</b>	rectangular; Q08
Dimensions	32x 20x 8mm
Housing material	metal, GD-Zn, black
Material active area	plastic, LCP-GF30, black
Connection	connector, Ø8 mm
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Protection degree	IP67
<b>Operating voltage display</b>	LED green
Switch state display	LED yellow

**Wiring diagram**

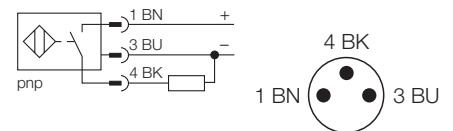

**Function principle**

Inductive sensors are designed for wear-free and non-contact detection of metal objects. Due to a ferrite-less 3-coil system, uprox factor 1 sensors have distinct advantages. They detect all metals at the same switching distance, are magnetic field immune and feature large switching distances.

---

Mounting instructions	minimum distances
Distance D	2 x B
Distance W	3 x Sn
Distance G	6 x Sn

---

<b>Width of the active area B</b>	20 mm
-----------------------------------	-------

---

