


- rectangular, height 40 mm
- top active face
- plastic, PBT-GF30-V0
- factor 1 for all metals
- extended switching distance
- degree of protection IP68
- magnetic field immune
- predamping protection through self-compensation
- 1-side embedding possible
- 4-wire DC, 10..0.65 VDC
- change-over, pnp output
- connector, M12 x 1

<b>Type</b>	Ni70U-Q80-VP4X2-H1141
Ident-No.	1625833
<b>Rated operating distance Sn</b>	70 mm
Mounting condition	non-flush, partial embedding possible
Assured switching distance	≤ (0,81 x Sn) mm
Repetition accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Hysteresis	3... 15 %
ambient temperature	-25 ... + 70 °C
<b>Operating voltage</b>	10... 65 V DC
Residual ripple	≤ 10 % U <sub>SS</sub>
DC rated operational current	≤ 200 mA
No-load current I <sub>0</sub>	≤ 15 mA
Residual current	≤ 0.1 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes / cyclic
Voltage dip at I <sub>e</sub>	≤ 1.8 V
Wire breakage / reverse polarity protection	yes / complete
Output function	4-wire, change-over, pnp
Insulation class	□
Switching frequency	≤ 0.25 kHz
<b>Housing style</b>	rectangular; Q80
Dimensions	92 x 80 x 40 mm
Housing material	plastic, PBT-GF30-V0, black
Material active area	plastic, PBT-GF30-V0, black
Connection	connector, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Protection degree	IP68
<b>Operating voltage display</b>	LED green
Switch state display	LED yellow

**Wiring diagram**

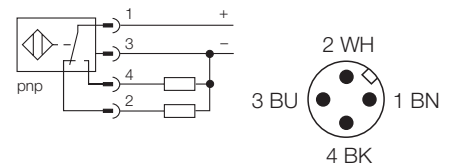

**Function principle**

Inductive sensors are designed for wear-free and non-contact detection of metal objects. uprox+ sensors have distinct advantages due to their patented multi-coil system. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardisation.