


**M8 x 1 / Ø 8mm round connector**  
**female M8 x 1 connector**  
**SKP3-10/S74**

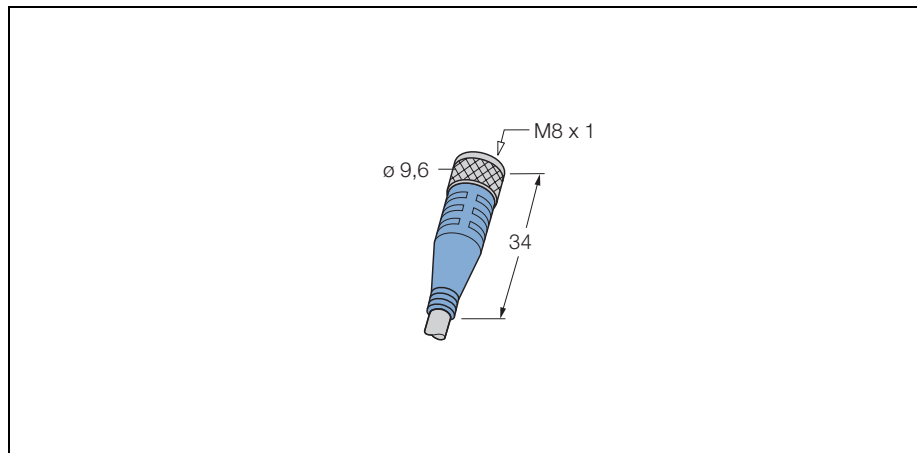

- **robust and pre-assembled round connector**
- **plastic moulding**
- **degree of protection IP67**
- **also available with other cable lengths and materials**
- **compact version for space limited industrial applications**
- **top-quality PUR cable for highest demands and high-flex applications**
- **PVC and halogen-free, trailing cable**
- **resistance to both bending and torsional stress**


<b>Type</b>	SKP3-10/S74
Ident-No.	8007342

<b>connector</b>	female connector, M8 x 1, straight
Polarity	3-pole
Contact carriers	plastic, TPU, black
Contacts	metal, CuZn, gold-plated
Grip	plastic, TPU, blue
Seal	plastic, FPM/FKM
Coupling nut/screw	metal, CuZn, nickel-plated stainless steel coupling nut/screw available on request
Protection degree	IP67, only with screws tightened
Mechanical lifespan	min. 100 Contact durability
Pollution degree	3/2

<b>Cable</b>	S74, D12YSL11Y-OB, halogen-free, highly flexible
Cable diameter	Ø 4.4 mm
Cable length	10 m
Cable jacket	PUR, orange
Core insulation material	TPE
Core insulation colours	BN, BU, BK
Core cross-section	3 x 0.25 mm <sup>2</sup>
Litz wire design	32 x 0.1 mm
Bending radius (moving state)	minimum 10 x Cable diameter

<b>Rated voltage</b>	max. 60 V
Insulation resistance	≥ 10 <sup>9</sup> Ω
Current carrying capacity	4 A
Forward resistance	≤ 5 mΩ
Cable ambient temperature	-50 ... + 105 °C

**Wiring diagram**



**cable quality S74**

Specially developed, high-flex control cable suited for use on industrial robots, rotation and tilting tables; it may also be used as a machine control cable for extreme environmental conditions. These cables are used in those applications where bending and torsional stress occur simultaneously and long-life characteristics are indispensable. The PUR cable jacket provides excellent resistance to oils, lubricants, cooling agents and other aggressive media. The cable resists continuous temperatures of up to +105 °C.