


- rectangular, height 20mm
- top active face
- plastic, PBT-GF30-V0
- factor 1 for all metals
- magnetic field immune
- extended temperature range
- high switching frequency
- 3-wire DC, 10..0.30 VDC
- normally open, pnp output
- cable connection

#### Wiring diagram



#### Function principle

Inductive sensors are designed for wear-free and non-contact detection of metal objects. Due to a ferrite-less 3-coil system, uprox factor 1 sensors have distinct advantages. They detect all metals at the same switching distance, are magnetic field immune and feature large switching distances.

<b>Type</b>	Bi15U-Q20-AP6X2
Ident-No.	1608800
<b>Rated operating distance Sn</b>	15 mm
Mounting condition	flush
Assured switching distance	≤ (0,81 x Sn) mm
Repetition accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Hysteresis	≤ ± 15 %, ≤ -25 °C v ≥ +70 °C
Ambient temperature	-30...+ 85 °C
<b>Operating voltage</b>	10... 30 V DC
Residual ripple	≤ 10 % U <sub>SS</sub>
DC rated operational current	≤ 200 mA
No-load current I <sub>0</sub>	≤ 15 mA
Residual current	≤ 0.1 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes / cyclic
Voltage dip at I <sub>e</sub>	≤ 1.8 V
Wire breakage / reverse polarity protection	yes / complete
Output function	3-wire, normally open, pnp
Insulation class	□
Switching frequency	≤ 0.25 kHz
<b>Housing style</b>	rectangular; Q20
Dimensions	68x 40x 20mm
Housing material	plastic, PBT-GF30-V0
Material active area	plastic, PBT-GF30-V0
Connection	cable
cable quality	Ø 5.2, LiYY-11Y, PUR, 2 m
Cable cross section	3 x 0.34 mm <sup>2</sup>
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Protection degree	IP67
<b>Operating voltage display</b>	LED green
Switch state display	LED yellow


---

Mounting instructions	minimum distances
Distance D	1,5 x B
Distance W	3 x Sn
Distance S	1 x B
Distance G	6 x Sn

---

<b>Width of the active area B</b>	40 mm
-----------------------------------	-------

---

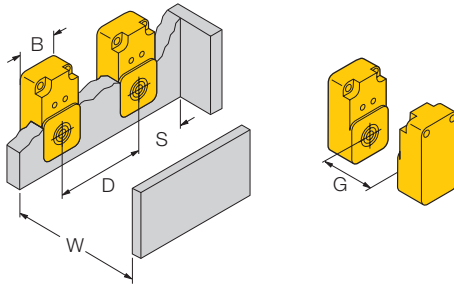

**Accessories**

Type code	Ident-No.	Short text	Dimension drawing
MH-Q20	6950010	for mounting with active face downwards	
MW-Q14/Q20	6945006	mounting bracket; material VA 1.4301	